

**ALIC5.1**  
**Passive ceiling speaker**

---



**Main features:**

- 2-way system with HF
- 5" coax driver with Kevlar membrane
- Wide dispersion
- Metal enclosure
- Quick mounting system
- Any RAL colour

## **ALIC5.1**

### **Passive ceiling speaker**


---

#### **System-overview:**

One-piece two-way ceiling loudspeaker with ball-proof grille, suitable for installation in ceilings of all kinds. The 5" two-way coax-chassis with kevlar-membrane features high sound quality and balanced frequency response. The dispersion angle from 180° offers a constant and precise radiation. Ideally suited for applications in conference-centers, AV-applications, shopping centers, restaurants and offices.

The optional 100-Volt transformer also ensures transmission of 50 Hz signals without distortion.

The Aimline ALIC51 impresses by high sound pressure level although two-way technology is used. Aimline-Speakers are completely built in Germany.

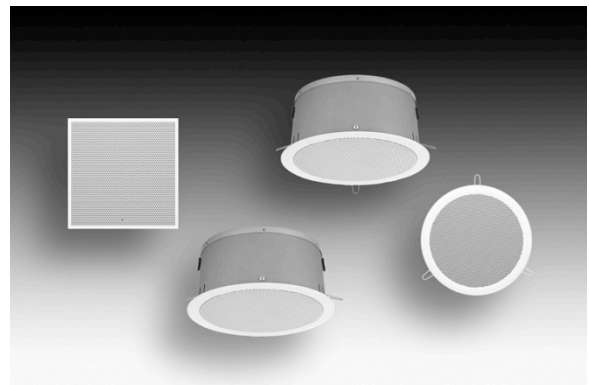

## **ALIC5.1**

### **Passive ceiling speaker**

---

#### **Technical Data:**

Configuration:	Passive 2-way fullrange system
Assembly:	5" coax driver with Kevlar membrane
Power handling:	30Watts, 8 Ohm
100 Volt	optional: 30/15/7,5 Watts
Dispersion:	180° (-6dB, 1kHz-8kHz)
Sound-pressure:	93dB
Frequency range:	50Hz – 22kHz
Colour:	Standard RAL9016 white, any RAL colour optional
Enclosure:	Steel, powder coated
Weight:	1,6kg
Dimensions:	167 x 109 mm
Cutout diameter:	140 – 150mm