

ALIC8 SUB
Passive ceiling Subwoofer



Main features:

- 8" driver with Kevlar membrane
- Wide dispersion
- Metal enclosure
- Quick mounting system
- Any RAL colour

ALIC8 SUB

Passive ceiling Subwoofer


System-overview:

One-piece ceiling subwoofer with ball-proof grille, suitable for installation in ceilings of all kinds. The 8" chassis with kevlar-membrane features high sound quality and balanced frequency response. Ideally suited for applications in conference-centers, AV-applications, shopping centers, restaurants and offices, where an addition of low end is required.

The optional 100-Volt transformer also ensures transmission of 50 Hz signals without distortion.

The Aimline ALIC8 SUB impresses by high sound pressure level.

Aimline-Speakers are completely built in Germany.

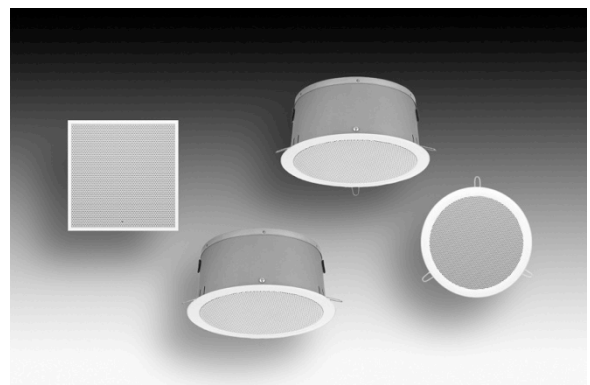

ALIC8 SUB

Passive ceiling Subwoofer

Technical Data:

Configuration:	Passive ceiling subwoofer
Assembly:	8" driver with Kevlar membrane
Power handling:	100Watts, 8 Ohm
100 Volt	optional: 30/15/7,5 Watts
Dispersion:	omni
Sound-pressure:	94dB
Frequency range:	30Hz – 150Hz
Colour:	Standard RAL9016 white, any RAL colour optional
Enclosure:	Steel, powder coated
Weight:	2,5kg
Dimensions:	252 x 90 mm
Cutout diameter:	215 - 230