


ALW 6C

Passive multifunctional fullrange speaker

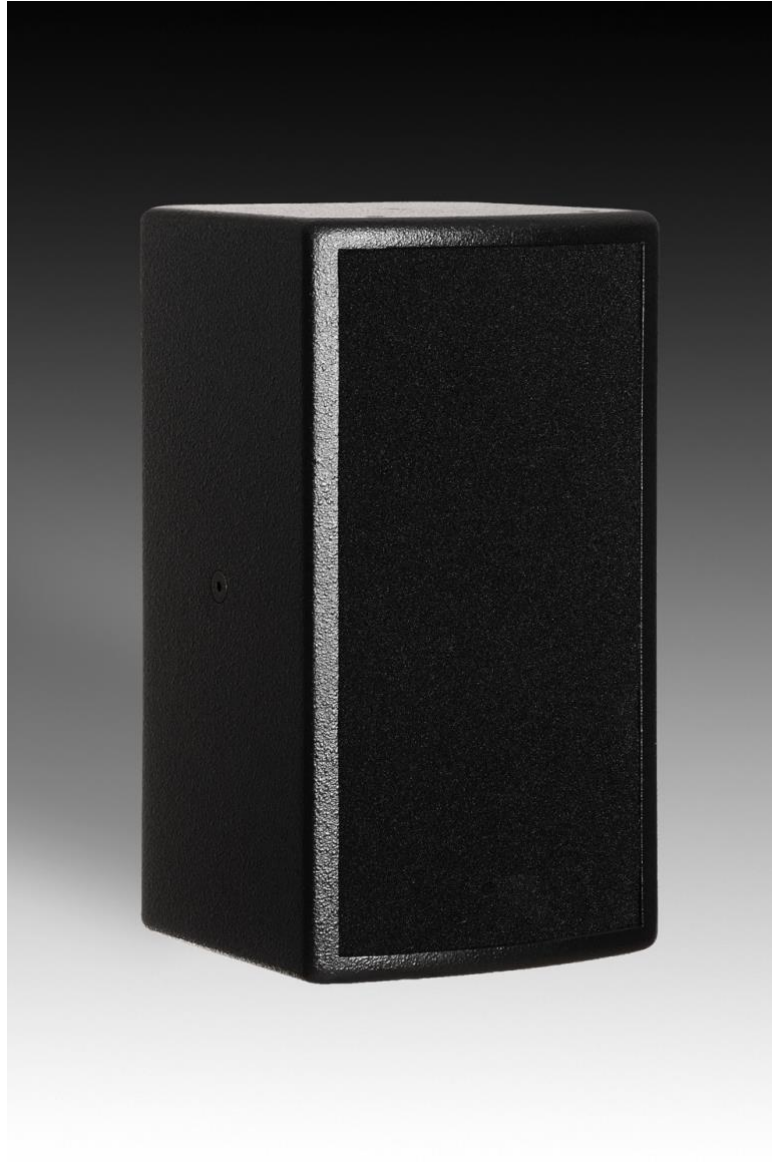

Main features:

- 2-way system
- 1 x 6" coax driver
- HF driver on CD horn
- Cardioid-technology
- High SPL
- Wooden enclosure
- Slim Design
- Exact dispersion



ALW 6C

Passive multifunctional fullrange speaker

System-overview:

The ALW 6 C is a very compact PA- and monitor-loudspeaker in a tuned bass-reflex enclosure in traditional 2-way technology for professional users. The special advantages are: Coaxial speaker, high power handling and distinctive rear attenuation down to low frequencies in a compact size. In acoustically challenging surroundings these loudspeakers set new standards. Linear frequency and phase response as well as extremely low distortion even at high sound pressure levels complete the characteristics.

Available as IP64-version on request.



ALW 6C

Passive multifunctional fullrange speaker

Technical Data:

| | |
|------------------------|--|
| Configuration: | 2-Way-fullrange-System, Bass reflex |
| Assembly: | 1 x 6" neodymium-chassis 1 x HF-driver |
| Impedance: | 16Ohm |
| Power handling | 400/800Watts |
| Dispersion horizontal: | 80° (-6dB, 1kHz-8kHz) |
| Dispersion vertical: | 60° |
| SPL (1W/1M): | 98dB |
| SPL max: | 130dB |
| Frequency response: | 50Hz – 18kHz |
| Enclosure: | Plywood, powder coated |
| Connector: | Speakon® |
| Colour: | Standard RAL9005 black, any RAL colour available |
| Weight: | 11kg |
| Dimensions: | H-2800 x W-500 x D-340 (mm) |
| Accessories: | Horizontal and vertical wall mount brackets |
| Options: | RAL-colour, 100-Volt transformer Available as IP64-version on request |